



Meaningful Innovation.

INSTRUCTION MANUAL

LED WATERPROOF LAMP FITTING

IP65
RATING

02 YEAR
WARRANTY*



TECHNICAL DATA


MODEL	VT-120001	VT-120002	VT-121001	VT-121002
SKU	24485	24486	24487	24488
WATTS [Tube not included]	1x20W (Max)	2x20W (Max)	1x22W (Max)	2x22W (Max)
INPUT VOLTAGE	AC:220-240V, 50Hz	AC:220-240V, 50Hz	AC:220-240V, 50Hz	AC:220-240V, 50Hz
BEAM ANGLE	120°	120°	120°	120°
LIFE SPAN	10,000 Hours	10,000 Hours	10,000 Hours	10,000 Hours
ON/OFF CYCLE	20,000 Times	20,000 Times	20,000 Times	20,000 Times
MATERIAL	PC + ABS	PC + ABS	PC + ABS	PC + ABS
CLIP NUMBERS	10	10	10	10
DIMENSION	1276x62x56mm	1276x91x56mm	1576x62x56mm	1576x91x56mm

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.



This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code
to access the manual in
multiple languages.



FR

Cet appareil,
ses accessoires
et cordons
se recyclent

À DÉPOSER
EN MAGASIN



À DÉPOSER
EN DÉCHÈTERIE



ou

Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation should only be done by a certified electrician.
3. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
4. Terminal block not included.
5. Must be connected to waterproof terminal box.
6. For indoor use and outdoor use


NOTICE

- Starter not required • Direct Installation


LAMP REPLACEMENT INSTRUCTION

Unlock the clips and open the diffuser to replace or install the tubes.


WIRING DIAGRAM



INSTALLATION INSTRUCTIONS

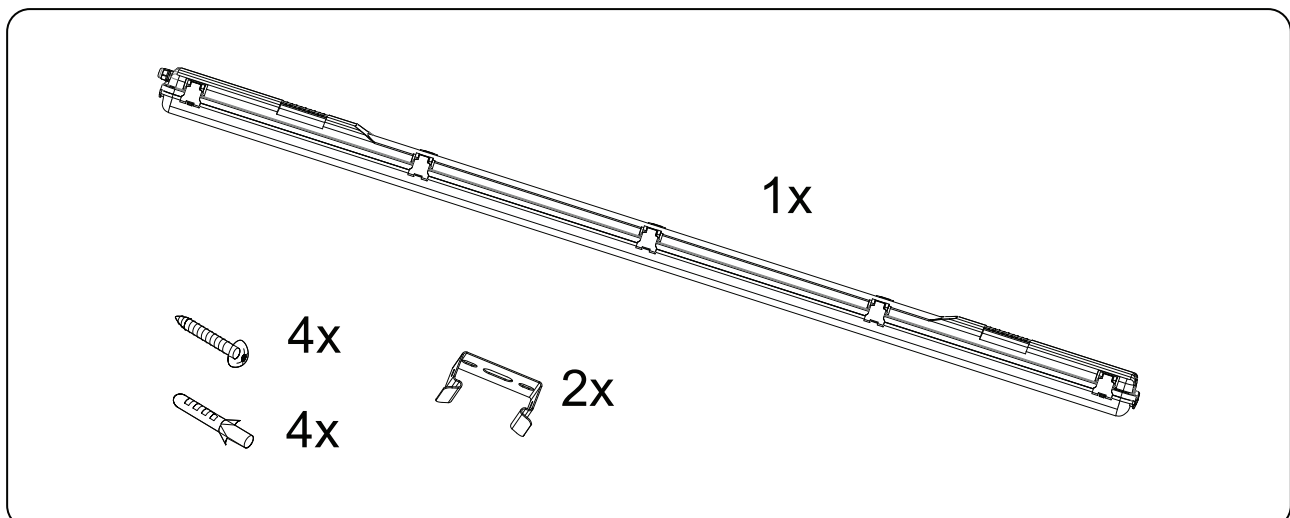


1

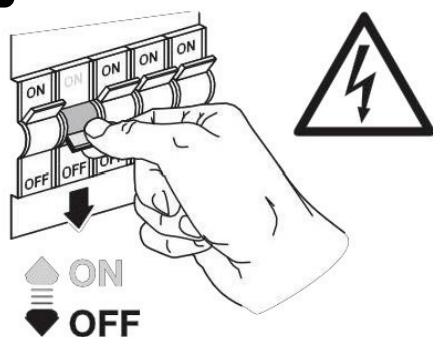


1. Turn off the power supply before starting the installation.

2

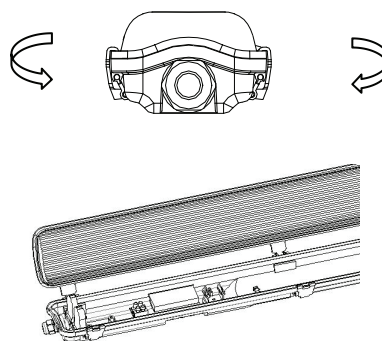


2. Release the lampshade clips and carefully open the lampshade.

3

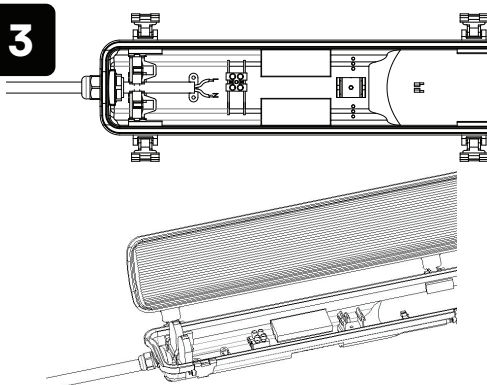


3. Pass the cable through the waterproof connector and connect it securely to the terminal block.

4

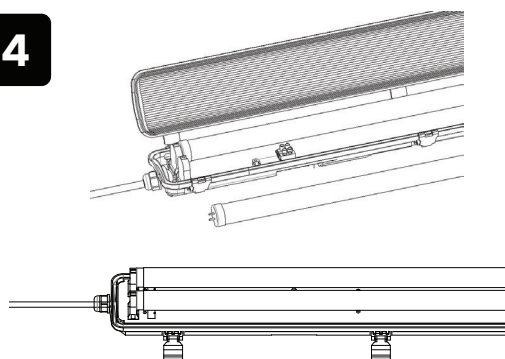


4. Install the lamp tube properly into the fixture.

5

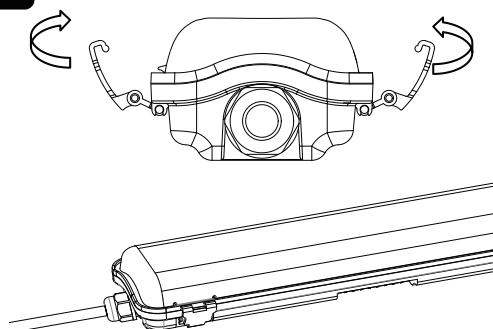


5. Securely fasten the lampshade buckle.

6




Model	xxx	xx
VT-120001, VT-120002	920	±35
VT-121001, VT-121002	1220	±35


6. Determine the mounting hole spacing according to the table.

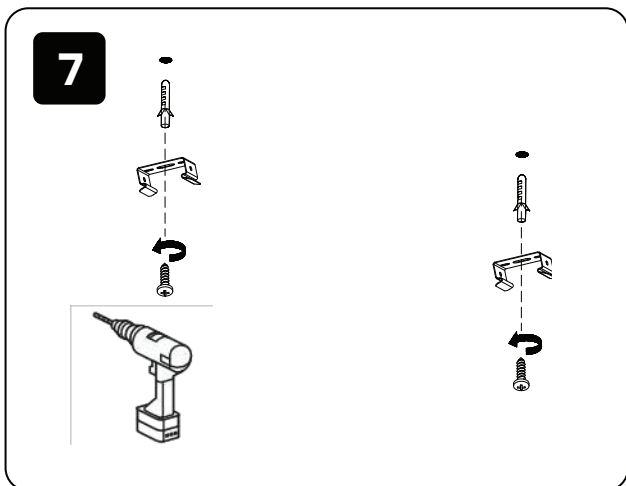


7. Fix the stainless steel bracket to the ceiling using screws and expansion anchors.

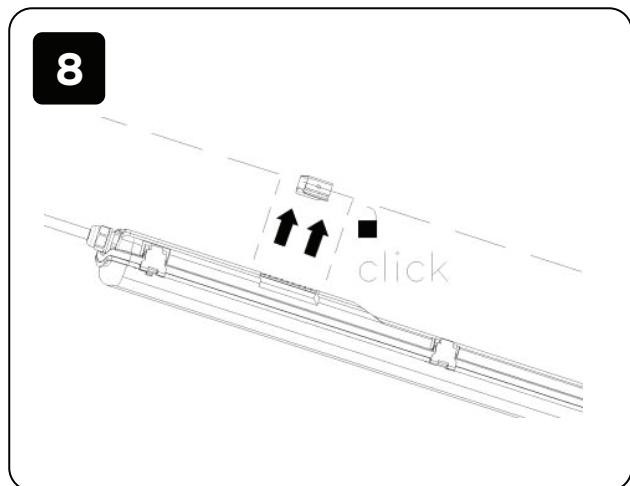

8. Mount the waterproof lamp onto the installed mounting brackets.

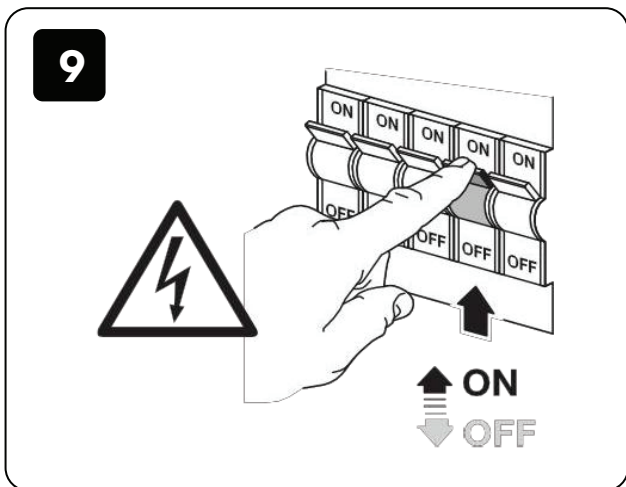

9. Restore the power supply and test the lamp.

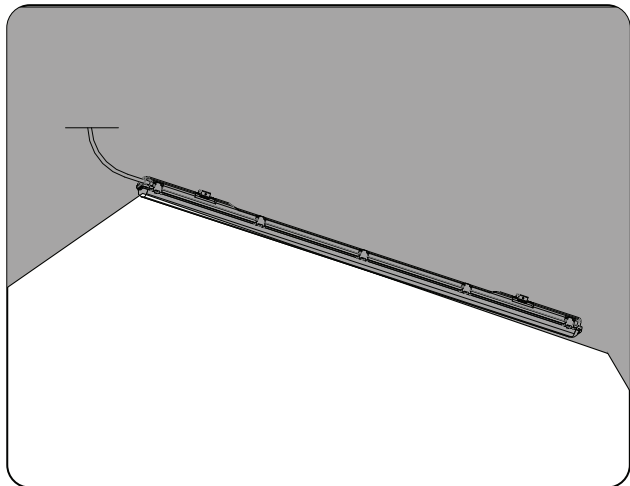

RoHS



V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND D02 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX