

SLI028035NW

Hermetic luminaire LIMEA GO, with a power of 50 W, high light efficacy 120 lm/W. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. IK07 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K). Suitable for both surface and suspended mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.





Power	50 W	Voltage	230 V
Colour temperature	4000 K	Colour of light	Neutral white
Beam angle	120 °	IK	07
Degree of protection (IP)	IP65		

Technical data

Code	SLI028035NW
Power	50 W
Nominal current	240 mA
Voltage	230 V
Energy efficiency class	E
Energy consumption	50 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.9
Useful luminous flux*	6000 lm (120°)
Luminous flux	6000 lm (360°)
Lamp efficacy	120 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	120 °
RA	80
Light source included	+
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Warranty	2 years
Lifespan	17000 h
(On/Off)	15000
Housing material	plastic
IK	07
Degree of protection (IP)	IP65
Dimension (AxBxC)	1200X60X52 mm
For use	Outside
Assembly method	On the ceiling, Suspended
Certified by the National Institute of Hygiene	Yes
Made in	PRC

Logistics data


Bulk packaging	15 pcs.
Quantity per pallet	240 pcs.
Gross weight (1 pcs.)	0.73 kg

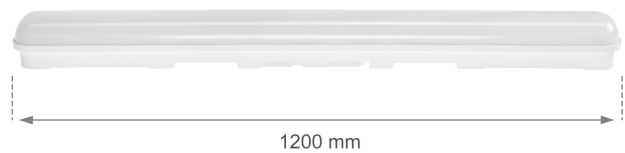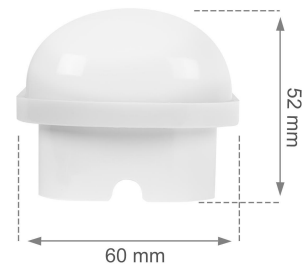

*applies to the LED source used

Related documents



 Declaration of Conformity



 Photometric file



 3D model

