

LUMINA BLOCK

SLI055013

IP44




| | | | |
|--------------------|---------------|---------------------------|--------------|
| Power | 2,5 W | Voltage | 3,7 V |
| Colour temperature | 3000 K | Colour of light | WW |
| Beam angle | 8-45 ° | Degree of protection (IP) | IP44 |

Technical data

| | |
|------------------------------|---|
| Code | SLI055013 |
| Power | 2,5 W |
| Voltage | 3,7 V |
| Protection class | III |
| Luminous flux | 135 lm (360°) |
| Colour temperature | 3000 K |
| Colour of light | WW |
| Beam angle | 8-45 ° |
| RA | 80 |
| Light source included | Yes |
| Uniformity of color SDCM max | 5 |
| Dimmable | No |
| Working temperature range | -20 / +40 ° |
| Warranty | 2 years |
| Lifespan | 17000 h |
| (On/Off) | 15000 |
| Housing material | ABS |
| Degree of protection (IP) | IP44 |
| Colour | Czarny |
| Dimension (AxBxC) | 100x83x107 mm |
| For use | Inside / Outside |
| Assembly method | On the ceiling |
| Application | INT / EXT |
| Made in | PRC |
| Other | Working >12h, charging 6-8h, PIR sensor, , |

Logistics data


| | |
|---------------------|----------|
| Bulk packaging | 12 pcs. |
| Quantity per pallet | 432 pcs. |

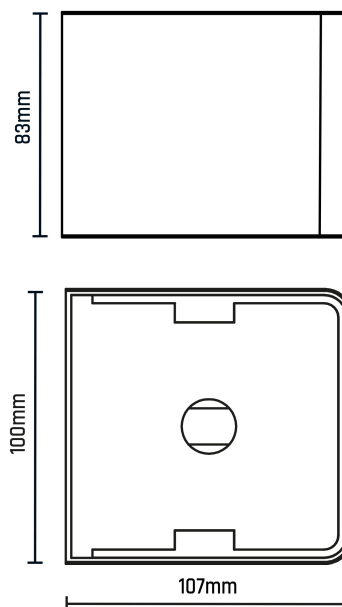

*applies to the LED source used

Related documents



 Declaration of Conformity