

## **INSTALLATION INSTRUCTION**

### **LED UFO HIGHBAY**



### **INTRODUCTION**

Thank you for selecting and buying V-TAC LED Highbay. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any other query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best.

### **PRODUCT FEATURES**

- Powerful LED light source with unique design..
- Unique high purity die-cast aluminum heat sink and high efficiency constant current/voltage driver.
- Water proof, dust proof and an corrosive.
- No maintenance, easy to install, high efficiency, low electricity, power saving, long life span, low temperature and no glare.

### **PRODUCT FEATURES**

Perfect fit for industrial usage, warehouse & super markets, workshops, factories, gas stations, exhibition halls, stadiums and other vast areas.

### TECHNICAL PARAMETER

Direct Connect Voltage:	AC 90-295, 200-240V, 220-240V, 50/60Hz
Beam Angle:	90° / 120°
CRI:	>80
Protecting Rating:	IP44 / IP65
Operating Temperature:	-20°C to +40°C


### INSTALLATION

#### ! WARNING



- Install only by certified electrician.
- Proper grounding should be ensured throughout installation.

#### ■ Wiring Diagram

brown    --L--  
 blue     --N--  
 yellow/green



label

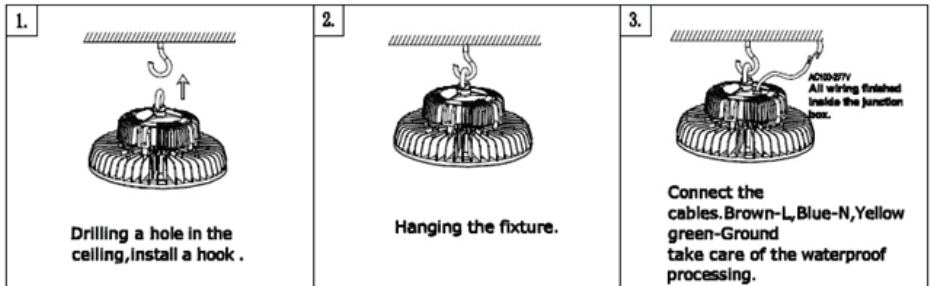



## **NOTE**

- The product uses a very high power LED. As with any light source, direct viewing should be avoided.
- NOTE: Although easy to fit, this lamp requires wiring to the main and for safety should only be fitted by a qualified electrician.
- Having issued this warning, the company accepts no responsibility for issues arising for any failures to comply with these clear instructions.
- The company will not accept any responsibility for any other issues arising from improper use of fitting of this product as these matters are beyond our control.

## **WARRANTY**

- This product is warranty from manufacturing defect only.
- The warranty is valid for 2 years from the date of purchase.
- The warranty does not apply to damage caused by installation or abnormal wear and tear.
- The company gives no warranty against damage to any surface due to incorrect removal and installation of the product.