




VT-6244

PORTABLE SPEAKER

First: Product operation diagram

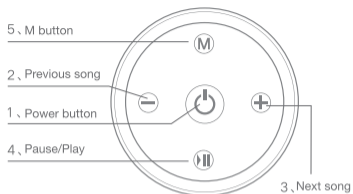

1. Power button: long press the Power button to achieve the Power on / Power off in any mode
2. Previous song: Long press this button to achieve the volume down in any mode, Short press this button to achieve the previous song function in MP3 mode and Bluetooth mode, short press this button is no effect in LINE IN mode
3. Next song: Long press this button to achieve the volume up in any mode, Short press this button to achieve the next song function in MP3 mode and Bluetooth mode, short press this button is no effect in LINE IN mode
4. Pause/Play: Short press this button to achieve the Pause/Play in MP3 mode, Long press this button is no effect. Short press this button to achieve the Pause/Play in Bluetooth mode, Long press this button to disconnect the Bluetooth. Short press this button to achieve mute in LINE IN mode, long press no effect.
5. M button, mode conversion button, Short press this button to achieve mode switch in any mode, long press no effect.
6. TF card slot, support TF card with the capacity of 32M-32G.
7. charging interface, the input voltage is DC5V / 0.5A-1A, indicator light on red indicates it's charging, light off indicates charging finished.

Second, the use of instructions

1. Long press power button, the speaker will prompt "Enter to Bluetooth". In this status, the indicator is blue light and flash slowly.
2. Turn on the Bluetooth of mobile phone and search VT-6244, Match the speaker to the mobile phone with the initial pairing password "0000". After speaker prompted "Bluetooth connected", the blue indicator light will stop flashing, and then the music file in the mobile phone can be played via Bluetooth. Bluetooth pairing time is about 10 seconds; it will be different for different mobile phones as the Bluetooth version is different.
3. The speaker also can answer/hang up the phone call under Bluetooth mode, if the speaker already connected by Bluetooth, when there is a calling in, click the Pause/Play button once to achieve answering the phone call, when finish the phone call, click the Pause/Play button again to achieve the hang up.
4. After the two machines are powered on, double-click the button of the speaker 1 to enter into the box search mode. After the two machines are paired successfully, you can hear a sound "Ding", then the blue indicates light of the host speaker (Speaker 1) will flash quickly and the blue indicates light of the speaker 2 will keep steady blue light. Then turn on the mobile phone bluetooth, search the host speaker (speaker 1), the connection is successful, both machines will play cell phone music, in the box mode, double-click the power button to exit the box mode (main and auxiliary machine is not fixed which machine, boot random confirmation)
5. FM function, under the FM state, short press the pause/play button to automatically search the channel, long press no effect, short press the previous song button to achieve the back channel function, short press the next song button to read the channel forward.
6. Reset function, short press the Previous song button and M button (mode conversion button) at the same time to achieve the reset function.
7. Turn off the power, when it is no longer used, please turn off the speaker to prevent the power consumption

Specification

Power Output: 5W
Battery: 3.7V, 1500mah
Charging Input: DC 5V, 1.0A.
Charging Time: 2-3 hours
Play Time: Upto 6 hours.

In case of any query/issue with the product,
please reach out to us at support @ v-tac, eu
V-TAC EUROPE LTD, Bulgaria, Plovdiv 4000, Bul.
L, Karavelov 9B
Website: www.v-tac.eu