




Meaningful Innovation.

INSTRUCTION MANUAL

LED BACKLIT PANEL

TECHNICAL DATA

MODEL	VT-61043
SKU	24366, 24367
SHAPE	Square
WATTS	40W
LUMEN @SPHERE360°	4500 Lm
BEAM ANGLE	110°
CRI	≥80
DF	≥0.9
BODY TYPE	Fe + PS
ON/OFF CYCLE	15,000 Times
LIFE SPAN	25,000 Hours
OPERATION TEMPERATURE	-10°C to +35°C
PROTECTION RATING	IP20
INPUT VOLTAGE	AC: 220-240V, 50/60Hz
CONNECT WITH DRIVER	1050mA
DIMENSION	595x595x33mm

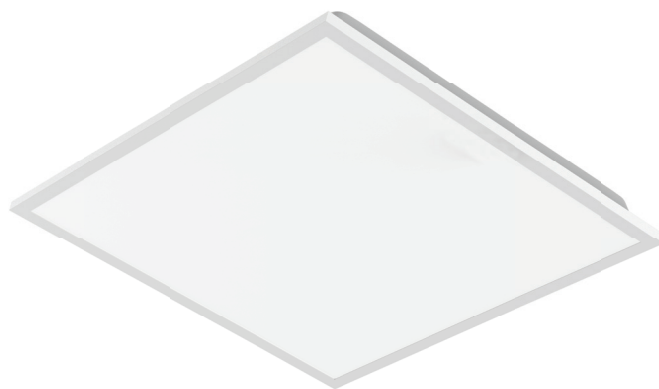

03 YEAR
WARRANTY*

This product contains a light source of energy efficiency class '<E>', where '<E>' shall be replaced by the energy efficiency class of the contained light source.

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 3 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING


1. Please make sure to turn off the power before starting the installation.
2. Installation should only be done by a certified electrician.
3. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
4. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
5. For Indoor use only



This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.




MULTI-LANGUAGE MANUAL QR CODE


Please scan the QR code to access the manual in multiple languages.



Luminaires not suitable for covering with thermally insulating material.




Replaceable light source
by a professional



Replaceable control
gear by a professional

INSTALLATION DIAGRAM

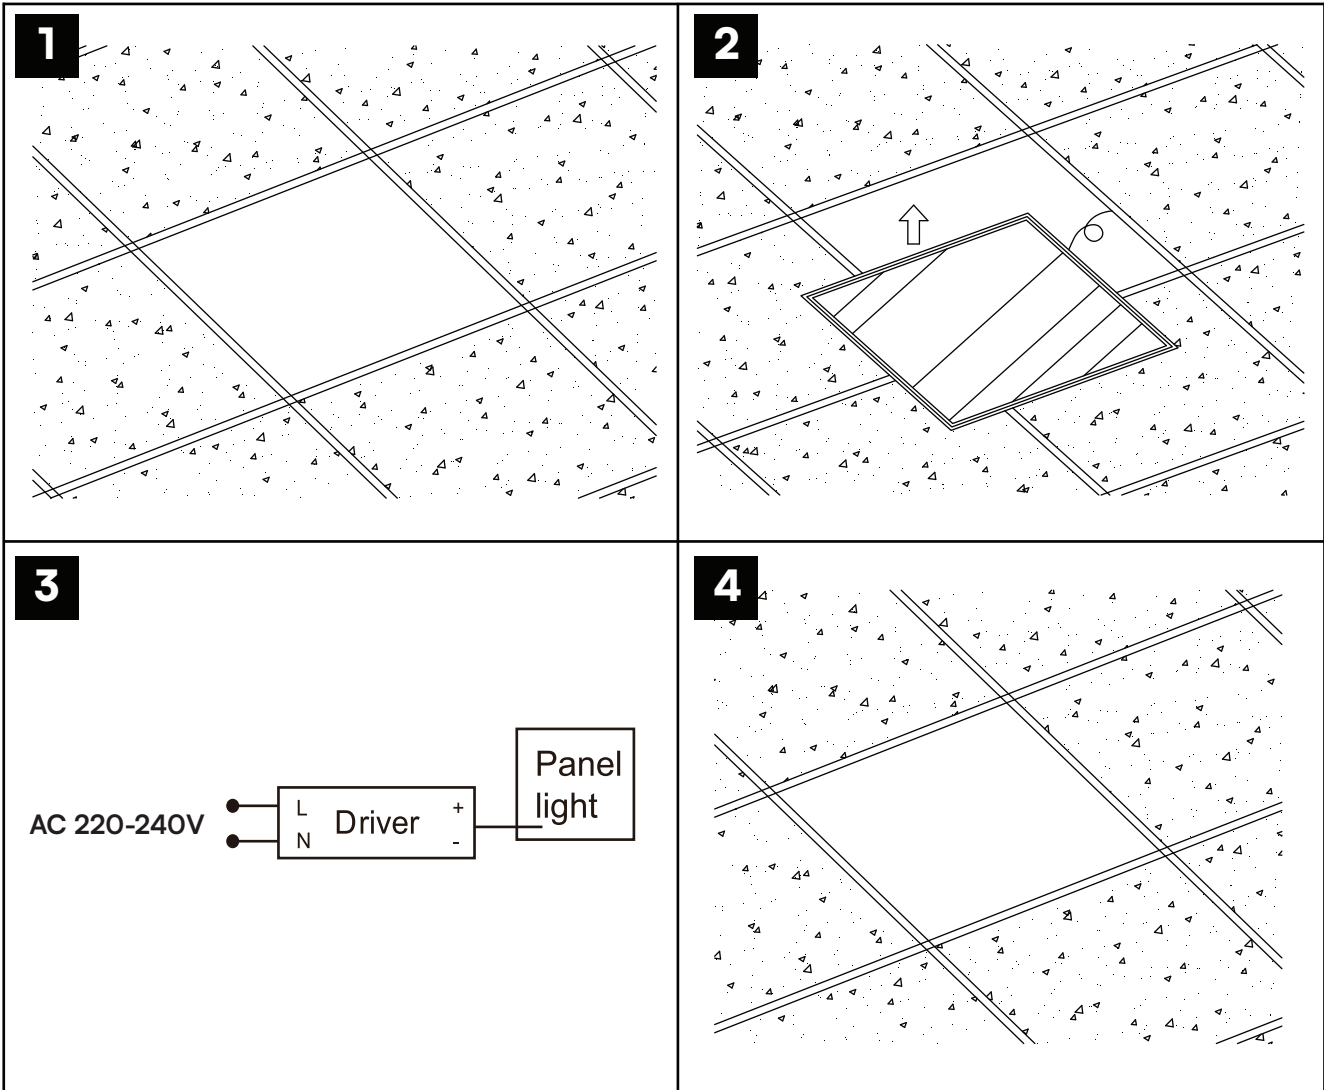

INSTALLATION INSTRUCTIONS


1. Ensure the power is turned off before starting the installation.
2. Cut an appropriately sized hole in the ceiling.
3. Mount the panel securely into the ceiling opening.
4. Connect the DC cable from the panel to the driver.
5. Connect the AC source cable to the input side of the driver.
6. Turn on the power and test the lamp.

Note: The panel works on DC 30-40V, please connect correctly with the conductor before connecting the conductor to the power supply main.



DISMANTLING INSTRUCTIONS

(For Market surveillance team only)

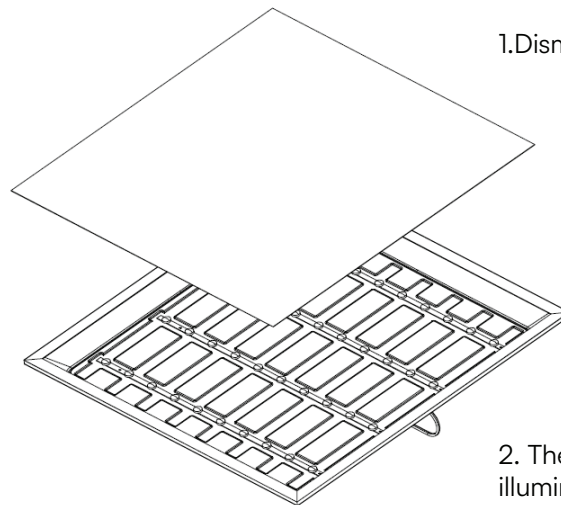

Note: Light source removal will void the warranty



V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT:
SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND D02 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT:
SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX